




26400

26401

26402

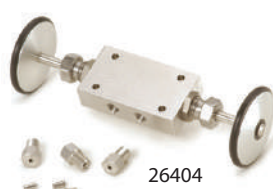

26404



26403



26406




26407

Valves for HPLC

Our valves have low internal volumes and are rated to 15,000 psi (103,421 kPa). They feature a two-piece stem assembly in which the rotating upper shank is coupled through a ball joint to a static lower stem. Only finger-tight torque is required to make the seal.

Description	qty.	cat.#
Through Valve for HPLC, 1/16" Fittings, 1/4-28, Stainless Steel, Includes Nuts and Ferrules	ea.	26400
Angle Valve for HPLC, 1/16" Fittings, 1/4-28, Stainless Steel, Includes Nuts and Ferrules	ea.	26401
Bottom Vent Valve for HPLC, 1/16" Fittings, 1/4-28, Stainless Steel, Includes Nuts and Ferrules	ea.	26402
Side Vent Valve for HPLC, 1/16" Fittings, 1/4-28, Stainless Steel, Includes Nuts and Ferrules	ea.	26403
Dual-Stem Three-Way Valve for HPLC, 1/16" Fittings, 1/4-28, Stainless Steel, Includes Nuts and Ferrules	ea.	26404
Prime/Purge Valve for HPLC, 1/4-28 Flanged Seat, Stainless Steel, with Tubing and Fittings	ea.	26406
Prime/Purge Valve Repair Kit for Prime/Purge Valve (includes: soft seal (2), PTFE O-ring (2), 7/32 hex key)	kit	26407

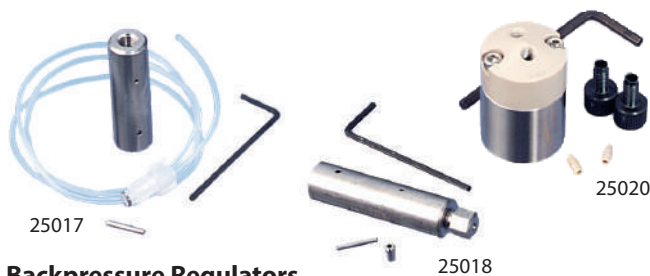

25017

25018

25020

Backpressure Regulators

Backpressure regulators can improve detector performance by preventing bubble formation in the detector flow cell. They also are useful in post-column reaction lines and between detectors and fraction collectors in preparatory work. Regulators are superior to more specific alternative solutions, like small-bore tubing, in which pressure varies with flow rate.

Our end-of-line and flow-through backpressure regulators are adjustable to ensure constant backpressure over a wide range of mobile phase viscosities and flow rates. The end-of-line model is available with 1/4-28 plastic flange-type fittings or high-pressure 1/16" compression fittings; this design adjusts from 15 to 60 psi (103 to 414 kPa). The flow-through design has 1/16" compression fittings and is adjustable from 7 to 75 psi (48 to 517 kPa).

Description	qty.	cat.#
Backpressure Regulator: end-of-line, 1/16" OD tubing, flanged	ea.	25017
Backpressure Regulator: end-of-line, high-pressure seat	ea.	25018
Backpressure Regulator: flow-through, 5 µL internal volume	ea.	25020

also available

Dampeners.

See **page 342**.

