



### LC Stainless Steel Capillary Tubing

- 316-grade stainless steel.
- Precise precut lengths.
- Smooth surface finish.
- Ultra clean.

Whether you need to replace system tubing as part of your troubleshooting or want to reduce the dwell volume of your system as you move to narrower columns, Restek has the quality tubing in the lengths and IDs you need. Each ID is color coded, so it is easy to identify and replace correctly.

		0.005" ID (red) max. 21,600 psi	0.007" ID (gray) max. 20,900 psi	0.010" ID (blue) max. 19,700 psi	0.020" ID (yellow) max. 15,800 psi
Length	qty.	cat.#	cat.#	cat.#	cat.#
1/16" OD Tubing					
5 cm	3-pk.	25240	25244	25248	25252
10 cm	3-pk.	25241	25245	25249	25253
20 cm	3-pk.	25242	25246	25250	25254
30 cm	3-pk.	25243	25247	25251	25255



### Tubing Dressing Tool

Opens stainless steel tubing bore and removes burrs.  
For 1/16" OD tubing or 1/8" OD tubing.


Description	Size	qty.	cat.#
Tubing Dressing Tool	1/16"	ea.	20188
Replacement Insert	for 1/16" Tubing Dressing Tool	ea.	20189
Tubing Dressing Tool	1/8"	ea.	20190
Replacement Insert	for 1/8" Tubing Dressing Tool	ea.	20191



### PTFE Tubing

- Ideal for mobile phase inlet lines.
- Chemically inert.
- Use to 500 psi (3,447 kPa) and 80 °C.

Description	OD	ID	Length	qty.	cat.#
PTFE Tubing	1/8"	0.063" (1.6 mm)	3 m	3 m	25306
PTFE Tubing	1/8"	0.094" (2.4 mm)	3 m	3 m	25307

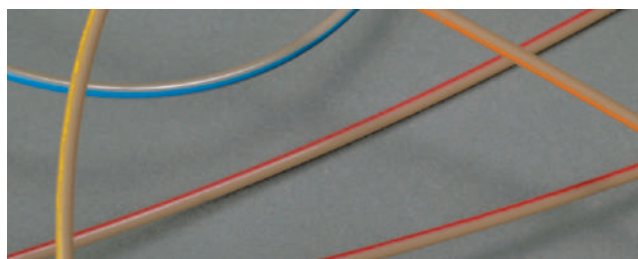

### Inert PEEK Tubing

- Replaces stainless steel, titanium, PTFE, or Tefzel® tubing.
- Less oxygen permeable and more temperature resistant (to 100 °C) than PTFE or Tefzel® tubing.
- Use with PEEK finger-tight or flangeless fittings.
- Use tubing ≤ 0.007" to 7,000 psi; tubing ≥ 0.010" ID to 5,000 psi.

Description	OD	ID	Length	Color Code	qty.	cat.#
PEEK Tubing	1/16"	0.0025"	1 m	pink dash stripe	3-pk.	25320
PEEK Tubing	1/16"	0.005"	3 m	red stripe	ea.	25065
PEEK Tubing	1/16"	0.007"	3 m	yellow stripe	ea.	25066
PEEK Tubing	1/16"	0.010"	3 m	blue stripe	ea.	25067
PEEK Tubing	1/16"	0.020"	3 m	orange stripe	ea.	25068

### Clean-Cut Tubing Cutter

- Burr-free, perpendicular cuts that will not distort the tubing OD or close the ID.
- Use on PEEK, PTFE, Tefzel®, and other polymeric tubing.



Description	qty.	cat.#
Clean-Cut Tubing Cutter	ea.	25069
Replacement Blade for Clean-Cut Cutter	ea.	25070

### Tubing Clip

Securely holds 1/16" or 1/8" tubing in beaker, flask, or bottle up to 4 mm thick.



Description	qty.	cat.#
Tubing Clip	5-pk.	25310



### PEEK Tubing Elbows

Tubing elbows (90° and 180°) are ideal for routing 1/16" PEEK tubing through your system. Simply snap the tubing into the elbow. Prevent pinching of PEEK tubing, which can cause high pressure.

Description	qty.	cat.#
PEEK Tubing Elbow, 90°	5-pk.	25308
PEEK Tubing Elbow, 180°	5-pk.	25309